

# CARING FOR YOUR C-TUG™ TROLLEY

## Thank you for purchasing a C-TUG trolley,

The C-TUG is designed for the movement of watercraft. It is specifically not designed for the movement of people either directly on the trolley or in or on watercraft or other objects placed on the trolley.


Due to the harsh and abusive environment where this product may be used, we suggest the following steps will help to extend the life of your C-TUG:

- 1: After using your C-TUG in salt water, sandy areas and dusty conditions remove the wheels, disassemble the chassis and hose down with fresh water. Wash the axle area thoroughly.
- 2: Do not clean with solvents or solvent based products and avoid commercial cleaning products. Fresh clean water is suitable for cleaning all C-TUG components.
- 3: Do not leave your C-TUG trolley in strong sunlight for extended periods. Your C-TUG is designed for use outdoors but both rubber and thermoplastics will degrade if left in strong sunlight for extended periods.
- 4: Do not over inflate the tyres, the recommended max inflation pressure is 30 PSI cold. Replace the valve stem caps after inflation.

Your C-TUG trolley is a robust product designed to take the hard work out of getting your watercraft to and from the water. With reasonable care you can expect your C-TUG to serve you well for many years.

C-TUG encourages users of C-TUG products to observe safe practice procedures when using products in marine environments.

# STRAPPING A BOAT TO YOUR C-TUG™

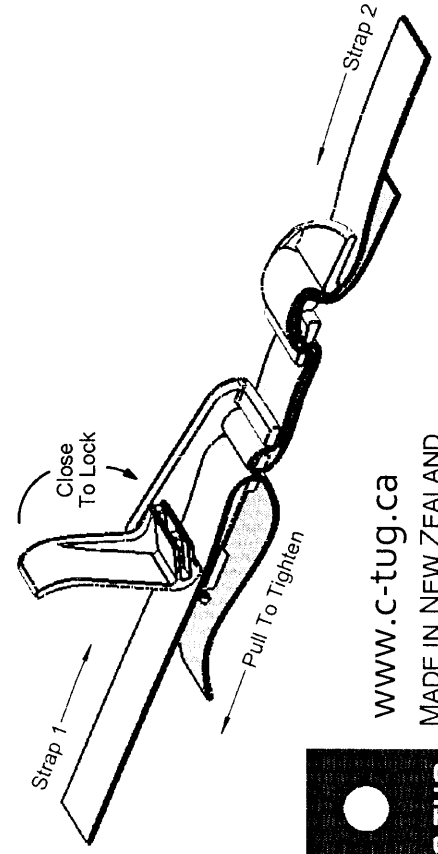

[www.c-tug.ca](http://www.c-tug.ca)

MADE IN NEW ZEALAND

DISCLAIMER: C-TUG is not responsible for injury or damage to persons or property resulting from the misuse of this product.




# C-TUG™ STRAP LACING INSTRUCTIONS


## STRAP 1:

Connect a strap to seat with ladder lock as shown here:


Repeat Step 1 on second seat

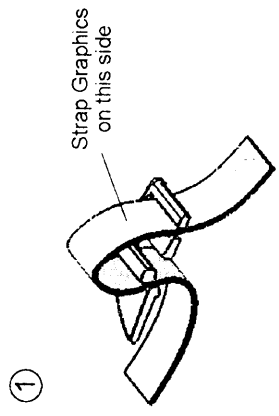


Create a loop as shown, and loop this through Mounting Point on the Seat

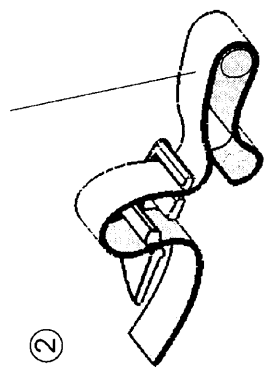

③

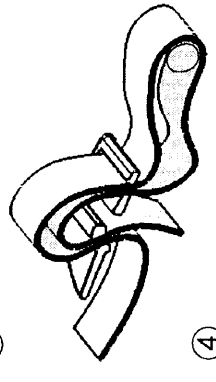


④

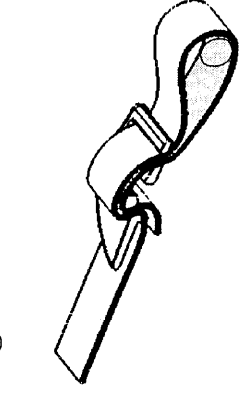


## STRAP 2:

Take one of the seats with strap connected, and Fit Cam-Lock Buckle as shown:

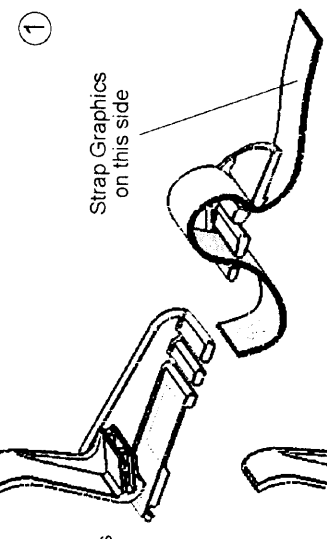

③

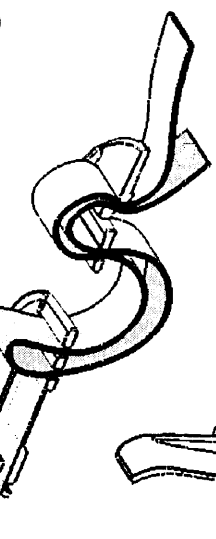

④

